



ACCESS COVERS & FRAMES

SOLO 78 S VOTC STC MSF

NF:TELIA

SOLO COVER

Class D400
EN124-2 : 2015
EN GJS 500-7 Iron
ISO 1083 / EN1563

DESIGN FEATURES :

- **Material(s) :**
SG Iron to ISO 1083 / EN1563, Grade 500-7.
- **Design load :**
400 kN to EN 124. Group 4 installation area - carriageway of roads (including pedestrian streets), hard shoulders and parking areas, for all types of roads vehicles (and lower groups).
- **Coating :**
Non toxic waterbased black paint.
- **Product Certification :**
NF Mark
This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (☞) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

SPECIAL FEATURES :

- **Mass :**
Cover : 57.2 Kg
Product total : 84.84 kg.
- **Surface finish :**
Cover: Anti-slip surface according to EN124. Surface with 4L design.
- **Seatings ensure non-rock stability and silence :**
"Polychloroprene rubber" cushioning insert to the cover.
- **Frame bearing pressure :**
 $p \leq 7.5 \text{ N/mm}^2$.
- **Securing of cover/grating within frame :**
With sufficient mass per unit area.
- **Frame type :**
Circular monoblock as cast.
Depth : 100 mm
Has supports for dirt pan DIN 1221.(not supplied)
- **Cover type :**
C : External diameter : 650 mm.
- **Hinge :**
Cover block at 90° preventing accidental closure.
Identification mark : "S".
Opening angle $\approx 120^\circ$.
- **Access control :**
Cover/Grating locked to the frame by means of turnbuckle stainless steel lock with coded key.

OPTION(S) :



Badging available please enquire

CIVIL ENGINEERING :

Frame provided with $\varnothing 20 \text{ mm}$ holes to dowel on $\varnothing 740 \text{ mm}$ circle if necessary.

HANDLING :

The cover is provided with one keyway to allow removal by means of a hook or pick.
The cover can be removed from the 120° angle.

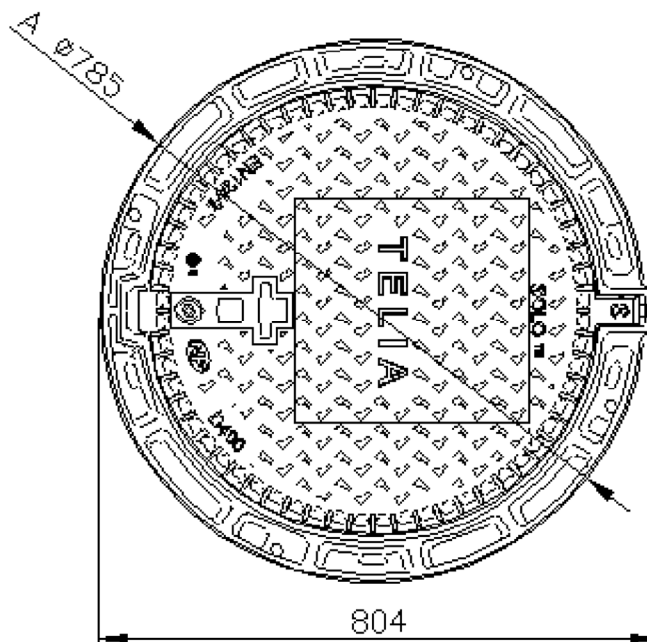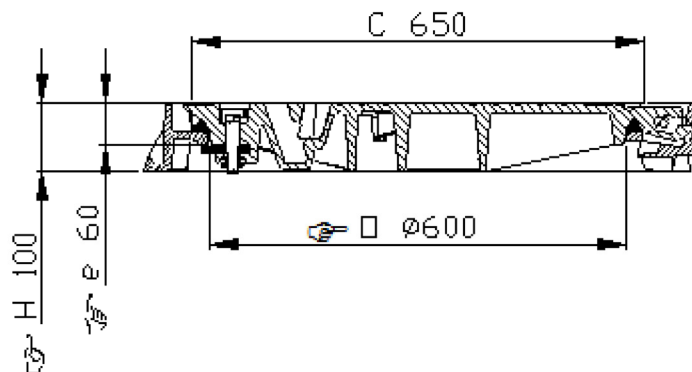

- (☞) Certified characteristics.
- Weights (kg) provided are the medium values detected during production of separate product parts with application of 10% of tolerance / Dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice / Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
ZI De Marivaux | Saint-Crépin Ibouvillers |
BP50409 | 60544 Méru Cedex | France

ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001

ejco.com

Data sheet :
FT_558172
Date updated :
23.02.2022
Printed : 24.02.2022