



MUNICIPAL
PRO SELF19 PKS VOTC MSF
UA
ACCESS COVERS

Class D400
EN124-2 : 2015
Cast Iron
EN GJS 500-7
ISO 1083 / EN1563

DESIGN FEATURES :

Materials :

SG Iron 500-7 ISO 1083 / EN1563

Design load :

400 kN to EN 124

Group 4 installation area - carriageway of roads (including pedestrian streets), hard shoulders and parking areas, for all types of roads vehicles (and lower groups).

Coating :

Non-toxic and non-polluting black water-soluble paint.

Certification :

UA

SPECIAL FEATURES :

Mass :

Product total : 82.000 kg.

Cover : 43.0 kg.

Surface finish :

Cover: Anti-slip surface according to EN124. Surface with 4L design.

Seatings ensure non-rock stability and silence :

Continuous wild flat "Polychloroprene rubber" cushioning insert to the cover.

Frame bearing pressure :

$p \leq 7.5 \text{ N/mm}^2$.

Securing of cover/grating within frame :

Secured by locking mechanism.

Frame type :

Selflevel frame for hot asphalt bedding.

Circular clear opening.

Has supports for dirt pan DIN 1221.(not supplied)

Cover type :

Hinged lids open to approx. 110°.

Opening angle \approx approx. 110°.

Hinge type :

Secured (Cover block at 90° preventing accidental closure). Identification mark : "L").

Locking system :

Key or hook is supplied separately, to order

Cover locked to the frame by means of a turnbuckle lock with coded key.

Remarks :

Pre-captive hinge :- Before product installation : insert a Ø12 mm (max) axis, 180mm long. - After product installation : spring loaded axis kit (code: 534814)".

OPTION(S) :

Badging available please enquire

CIVIL ENGINEERING :

Anchoring :

Selflevel type.

Use exclusively hot asphalt. The frame must not be seat on the concrete.


The specifications, as given by Document 1, Annex 1 from the NF110 standard are not applicable to this product.

HANDLING :

The cover is provided with one keyway to allow removal by means of a hook or pick.

The locking key is used as a handling key once the cover is unlocked.

The cover can be removed from the 90° angle.

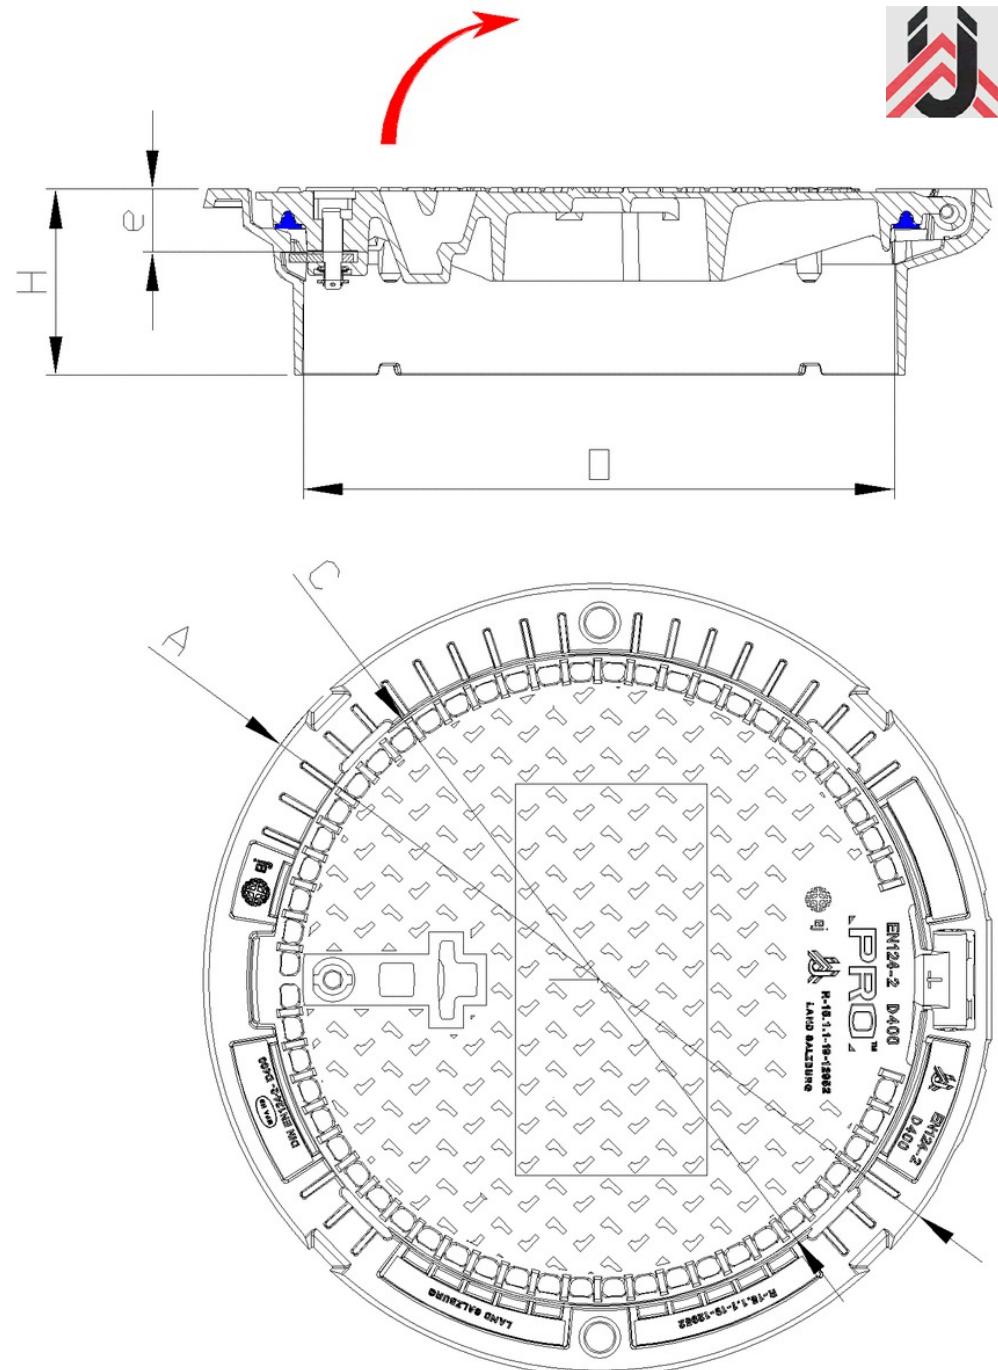

O	A	C	H	e
600	666	810	190	60

Uncontrolled distribution.
We reserve the right to modify specifications without prior notice.
Weights (kg), Dimensions (mm), and drawings provided for your guidance.

CONFIDENTIAL Property of EJ
EMEA Not to be used without permission.

EJ IN PICARDIE

Zone Industrielle de MARIVAU 60149 SAINT CREPIN IBOUVILLERS France

ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001

www.ejco.com/em/fr/

Data sheet : AP_562547 01

Date updated : 07.06.2025

Printed : 06.06.2025