
SAFIBRA

Solutions, When the Conventional Ones Run Out of Breath

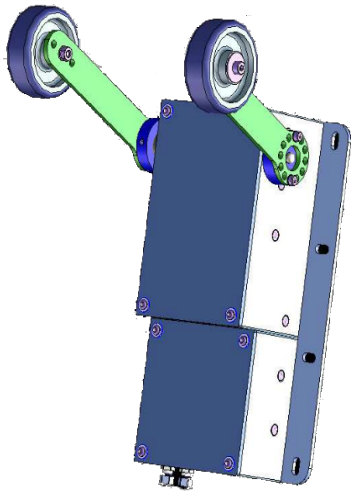

MULTI-COVER DETECTOR

MONITORING SYSTEMS

Remote monitoring of premises requiring permanent security

The Multi-Cover Detector is a specifically designed extension of FBG based Manhole detector for permanent monitoring of key premises and critical infrastructure using the state-of-the-art optical approach. Under the highest security requirements, it helps you to detect intrusion and vandalism attempts at monitored places, such as manholes, shafts, cable entrances, etc., providing you with real-time alerts. This gives you valuable time to take appropriate action in order to minimize damages to your property and potential profit loss.

100% passive detector

Detector is operated without need of power supply and therefore easily monitors places without the need for electricity and hazardous or hard to reach areas.

Temperature compensation design

The detector is physically designed to compensate temperature and doesn't require additional FBG grating.

Multi-part cover

The multi-part covers of manholes can be protected by using single FBG detector with mechanical extension.

KEY PRODUCT FEATURES & BENEFITS

Protect up to four parts covers

The mechanical extension can be scaled to monitor two, three or four parts of the cover using single detector. The full protection against intrusion and intrusion attempts is ensured.

Sensitive rotational touch system

This small and compact detector features high sensitivity to the variation of applied pressure. It identifies even the slightest intrusion attempts and gives you time to take action before it is too late.

Robust metal alloy material

The manhole detector comes with a robust design that is enabling withstand harsh environmental conditions and also temporal flooding without any damage to its functionality.

Low operating costs

Optical fiber detector is very durable and, if installed correctly and protected from the environment, can be operated with minimal maintenance and servicing.

Immune to EMI/RFI

The detector enables operation even in harsh environments, as the technology is fully passive, explosion safe and immune to electro-magnetic/radio frequency interference.

Leverage existing fiber optic network

The connection between unit and detectors is ensured via standard telecommunication optical fibers (e.g. dark fibers), which is very economical even for a large area of monitored objects.

Mounting accessories included

For easier installation on the bottom side or rear side of a structure, the basic mounting plates are delivered together with the detector. Additional accessories only upon request.

Advanced customization available

The manhole detector can be modified in order to meet your project's needs, like plastic for high-voltage environments.

20+ YEARS


PROJECT REQUIREMENTS

SECURITY
manholes, handholes, cable entrances, cabinets, pipeline shaft covers, entrance security, vandalism security, water flooding monitoring, cybernetic safety & security

COMMUNICATIONS
telecommunication networks, data transmission

INFRASTRUCTURE
critical infrastructure and hard to reach, explosive, harsh or hazardous areas

DEFENCE INDUSTRY
military/army, navy, air force

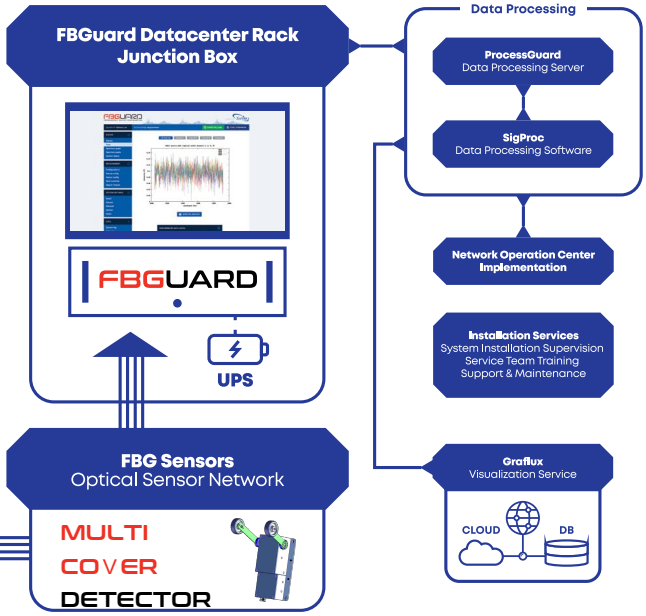

TECHNICAL PARAMETERS

Environmental and Mechanical

Multiple manhole covers	2, 3, 4
Size @ 2 parts manhole cover	80 mm x 200 mm x 27 mm
Detector weight	c. 300 g
Operational temperature range	-20 – +70 °C
Angular detector range	± 20°


Fiber Optic Cable

Fiber type	SMF G.652d or G.657.A1
Fiber input/output	**ruggedized** (protected against rough manipulation)
Fiber length	1 m
Fiber termination	**bare fiber** (scissor cut for splicing) - default **FC/APC connectors** - optional **other connectors** - upon request

Mounting

Mounting surface	any
Mounting plates	**basic 120mm x 200mm** delivered together with the detector **special or L-shaped** supplied upon request

We reserve the right to change these parameters.

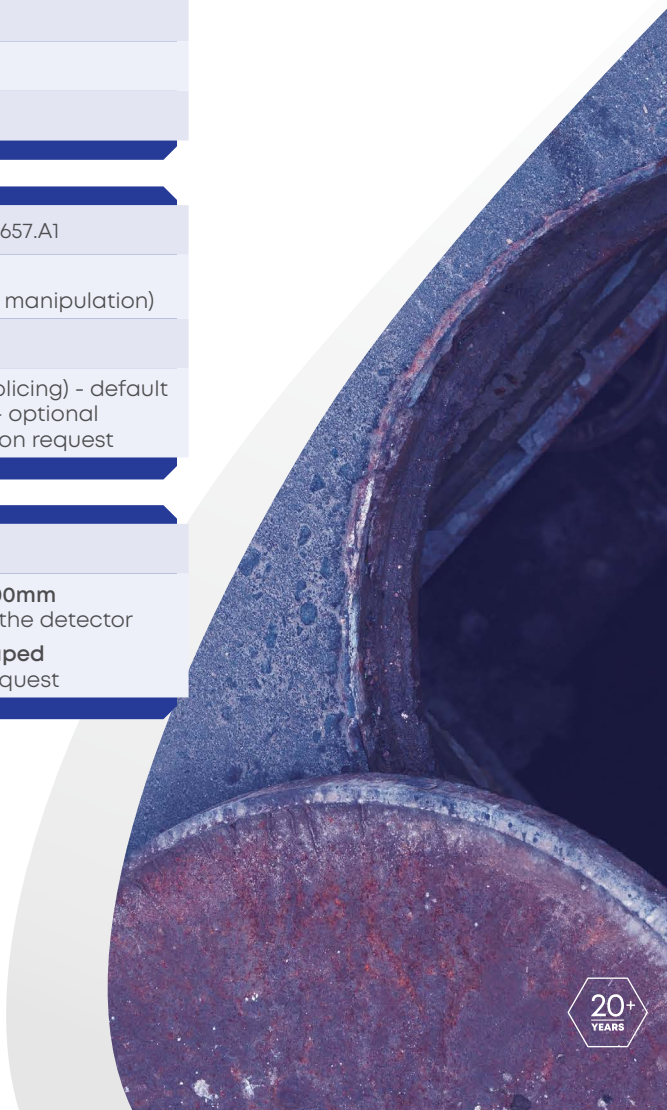

GET IN TOUCH WITH US

and we will recommend you the most suitable solution for your project.

SAFIBRA, s.r.o., U Sanitasu 1621, 251 01 Říčany, Czech Republic
+420 323 601 615 safibra@safibra.cz www.safibra.cz

20+ YEARS